

Scope of Work June 2026, JYC Marina

Marina Infrastructure Maintenance and Rehabilitation Works

1. Introduction:

Jeddah Yacht Club & Marina (JYC) invites qualified marine infrastructure contractors to submit proposals for the inspection, repair, refurbishment, replacement, and protective maintenance of marina floating dock infrastructure, gangways, wave breaker structures, navigation poles, quay wall surfaces, and associated marine assets.

The objective of this project is to restore structural integrity, improve operational safety, prevent further corrosion, and extend the service life of marina assets through comprehensive maintenance works. The scope includes Docks A, B, C, D, K, the Slipway Pontoon, Main Wave Breaker, Navigation Poles, and Quay Wall infrastructure.

2. Objectives

- Conduct a detailed site survey and verification of quantities prior to commencement.
- Supply all labour, supervision, tools, equipment, materials, consumables, and marine access equipment required.
- Dispose of waste materials in accordance with local environmental regulations.
- Maintain uninterrupted marina operations where reasonably practicable.
- Comply with all applicable Saudi Arabian safety regulations and marine industry standards.
- Submit method statements, risk assessments, work schedules, and quality control procedures before mobilization.
- Offer warranty on works completed

3. Scope Of Work: Gangway Rehabilitation Works

Applicable to: Dock A, B, C, D, K & Slipway pontoon

3.1 Timber Works

- Clean, prepare, sand, and apply marine-grade protective coating to all gangway timber planks.
- Replace any damaged timber sections identified during execution.

3.2 Roller System

- Remove and replace damaged gangway rollers.
- Supply additional PVC rollers as operational spare stock.

3.3 Teflon Wear Protection

- Remove damaged gangway flip protection pads.
- Supply and install new marine-grade Teflon wear pads.

3.4 Structural Steel Rehabilitation

Where applicable:

- Clean steel surfaces by mechanical preparation or approved blasting method.
- Remove corrosion and contaminants.
- Apply approved marine-grade anti-corrosion coating system.
- Repaint gangway H-beam support structures.

3.5 Anchor Bolt Replacement

Where applicable:

- Remove corroded foundation bolts and nuts.
- Supply and install new stainless steel or approved galvanized anchor bolts.
- Upgrade bolt sizing where specified to improve structural stability.

3.6 Electrical Safety Improvements

The Contractor shall:

- Install weatherproof protection for all exposed dock gate electrical components.
- Provide suitable enclosures, sealing systems, covers, and fixing arrangements.
- Inspect and rectify electrical grounding (earthing) systems for all gangways.
- Test and certify grounding resistance values following completion.

3.7 Cable Tray Works (Docks D and K)

The Contractor shall:

- Secure under-gangway cable trays using approved marine-grade support systems.
- Supply and install all required fixing accessories.
- Ensure cable tray alignment and support integrity.

Based on requirements identified across all dock gangways.

4. Pontoon Joint Plate Repairs

Applicable to Dock A, B, C, D, K

Preferred Method (Option A)

- Remove damaged joint plates.
- Drill two additional fixing holes on site.
- Install new fixings into pontoon concrete structure using approved plastic grips and marine-grade bolts.
- Seal all abandoned holes with approved marine repair compound.

Alternative Method (Option B)

- Weld four support bolts to joint plates where approved by JYC.

Joint Plate Quantities

Dock Quantity

Dock A 16

Dock B 30

Dock C 18

Dock D 24

Dock K 16

Total 104 Joint Plates

5. Pontoon Surface and Pile Refurbishment

Applicable to: Dock A, B, C, K, Slipway pontoon

The Contractor shall:

- Prepare all pontoon surfaces.
- Remove loose coatings and corrosion.
- Apply approved marine coating system.
- Repaint all pontoon surfaces.
- Prepare and repaint marina piles.
- Provide coating system data sheets and warranty information.

6. Fiberglass Pile Cap Replacement

The Contractor shall supply and install new fiberglass pile caps.

Quantities

Location Quantity

Dock A 9

Dock B 13

Dock C 9

Dock D 9

Dock K 5

Total 45 Pile Caps

The Contractor shall:

- Remove existing damaged pile caps.
- Supply marine-grade fiberglass pile caps.
- Install and secure pile caps in accordance with manufacturer recommendations.

7. Pile Bracket and Wear Pad Repairs

Applicable to: Dock D & K

The Contractor shall:

- Remove damaged wear pads.
- Supply and install replacement wear pads.
- Adjust pile bracket fixing hole alignment.
- Rectify bracket positioning to prevent premature wear.
- Supply spare wear pads for future maintenance.

Minimum Quantity

- 10 wear pads per dock, inclusive of spare stock.

8. Main Wave Breaker and Navigation Pole Rehabilitation

The Contractor shall:

Wave Breaker

- Prepare exposed steel surfaces.
- Remove corrosion.
- Apply approved marine anti-corrosion coating system.

- Repaint complete wave breaker structure.

Navigation Poles

- Remove corrosion.
- Repaint navigation poles.
- Replace heavily corroded foundation anchor bolts.

Manhole Repair

- Remove temporary plywood cover.
- Supply and install permanent marine-grade manhole cover.
- Reinstate surrounding area.

9. Quay Wall Surface Repainting

The Contractor shall:

- Prepare top surface of quay wall surrounding the marina basin.
- Remove deteriorated coatings.
- Apply approved marine coating system.
- Repaint quay wall top surfaces only.

10. Slipway Pontoon Structural Repairs

The Contractor shall:

- Inspect and repair stainless steel H-beam attached to quay wall.
- Reinstall and secure foundation anchor bolts.
- Repair damaged/spalled concrete around foundation areas.
- Reinstate concrete using approved marine repair materials.
- Ensure structural integrity and long-term durability of the installation.

11. Deliverables

The Contractor shall provide:

- Detailed work programme.
- Material submittals and technical datasheets.

- Quality assurance and inspection records.
- Coating specifications and warranties.
- Electrical test certificates.
- Completion report including photographs.
- As-built documentation where modifications have occurred.

12. Contractor Qualifications

The Contractor shall demonstrate:

- Previous experience in marina or marine infrastructure maintenance.
- Experience with floating dock systems and marine structures.
- Certified welding, coating, and electrical personnel.
- Relevant Saudi Arabian licenses and insurances.
- HSE management system and marine safety procedures.

13. Defects Liability Period

The Contractor shall provide a minimum 12-month Defects Liability Period (DLP) from Practical Completion covering workmanship, coatings, fixings, structural repairs, and installed components.

14. Proposal Submission Requirements

Tenderers shall submit:

1. Technical proposal.
2. Detailed pricing breakdown by work package.
3. Project schedule.
4. Resource plan.
5. Material specifications.
6. Similar project references.
7. HSE documentation.
8. Warranty commitments.


This Scope of Work is intended to form the basis of a competitive tender process for the rehabilitation and maintenance of Jeddah Yacht Club Marina infrastructure.

A DOCK






B Dock





C Dock

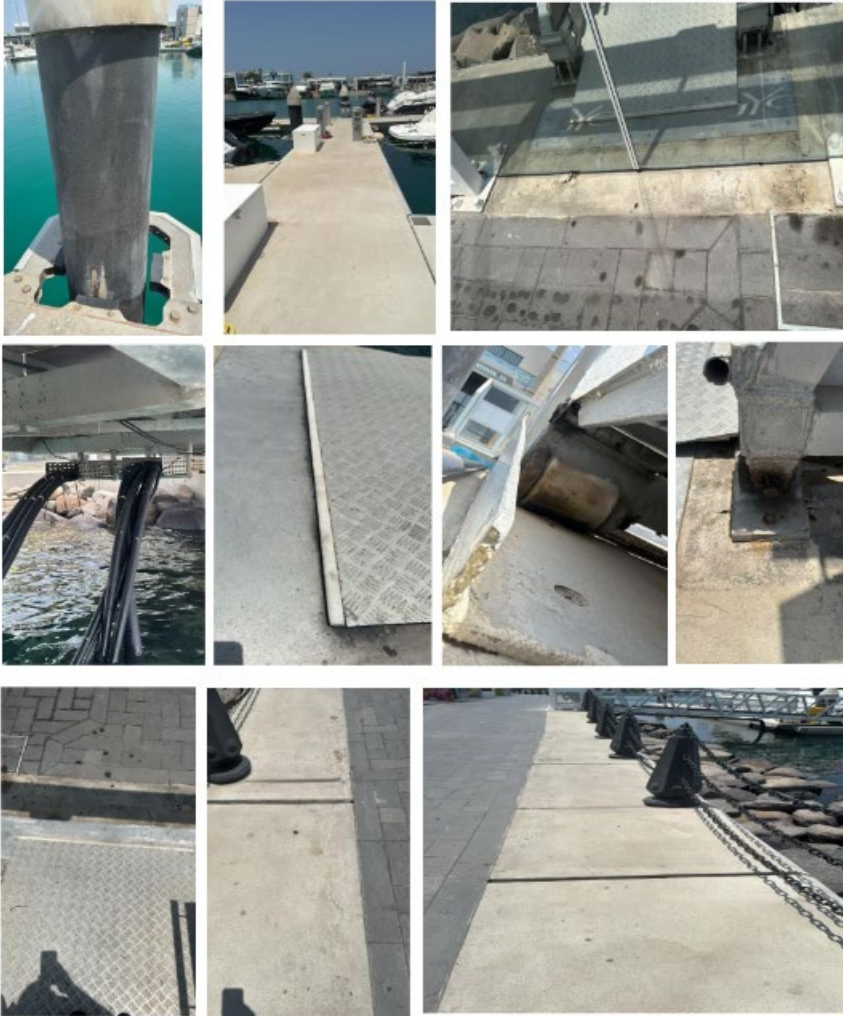


D dock




K dock



quay wall surface areas require
repainting. Around Marina

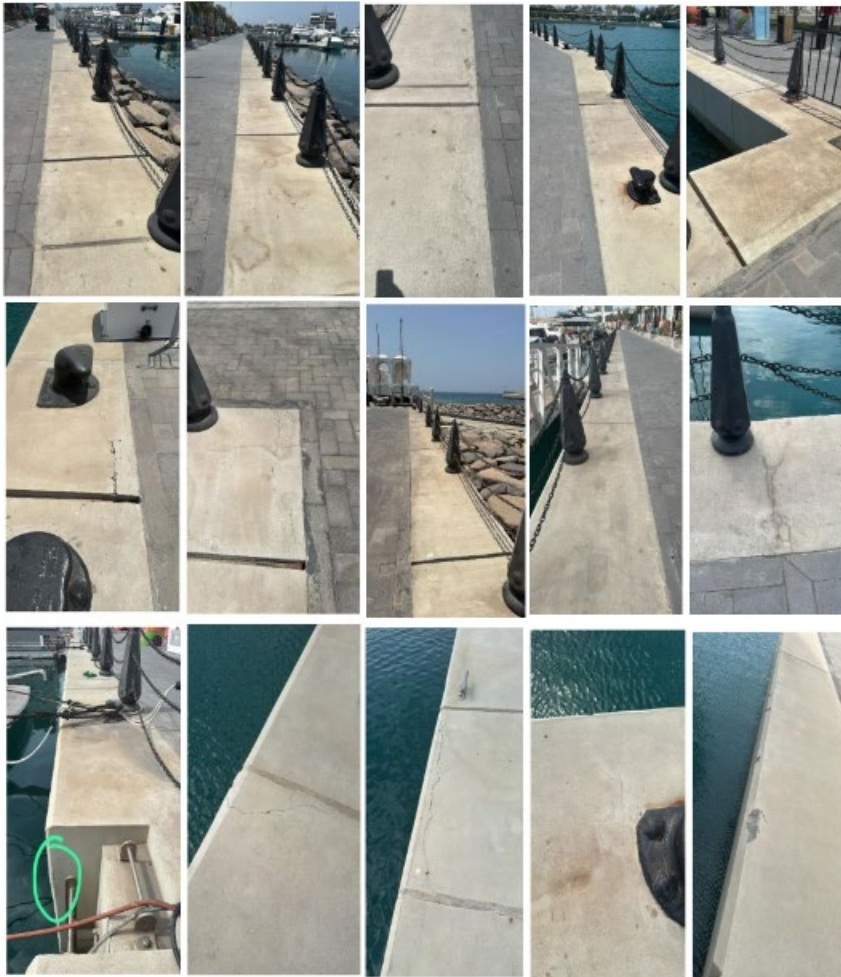

Main Wave Breaker & Navigation Poles – Pending Maintenance Items

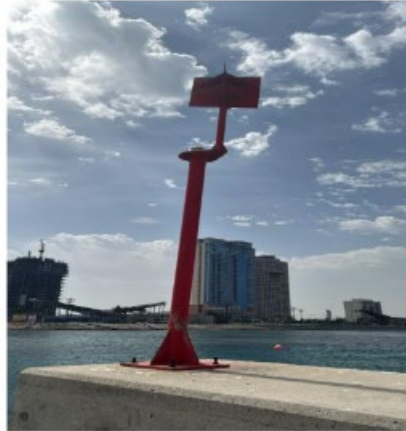



Slipway Pontoon

